

AREC

CI-22H

Full HD PTZ Conference Camera

20x Optical Zoom Lens. Wide View Angle

Equipped with a 20x optical zoom lens, AREC CI-22H PTZ Conference Camera is capable of production quality Full HD video output up to 1080/60p via HDMI, USB 3.0 and IP transmission. CI-22H features advanced ISP processing algorithms and exceptional Pan-Tilt mechanism to provide high resolution, vivid performance and smooth moves during video capture.



Built-in Tally Light



Main Features

Supporting Multiple Video-Output Interfaces

Supporting HDMI, USB 3.0 and IP transmission, AREC CI-22H can work seamlessly with various systems. CI-22H offers multiple control options, including external control device, a remote controller, and AREC Media Station through IP transmission. CI-22H has a built-in Tally light. Connected with AREC Media Station, the Tally light in CI-22H will light up in red as the recording and streaming turns on.



Fit for Any Indoor Environment


Quiet and Quick Pan/Tilt Mechanism

CI-22H supports 340 degree rotation, a 120 degree tilt range, and 20x zoom with auto focus capability. The pan/tilt/zoom control functions can be performed remotely. Adopting step driving motor mechanism, CI-22H camera works extremely quiet and moves smoothly.



Fully Enjoy the High Definition Video


With high performance H.264 compression technology, AREC CI-22H provides Full HD quality at up to 1080/60p. Featuring advanced ISP processing algorithms, CI-22H provides vivid images with fantastic color rendition. Low noise CMOS effectively ensure high SNR of camera video.

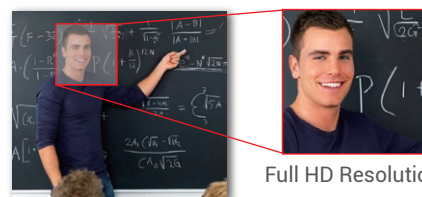

Full HD Resolution

Product Appearance

■ Camera Dimension

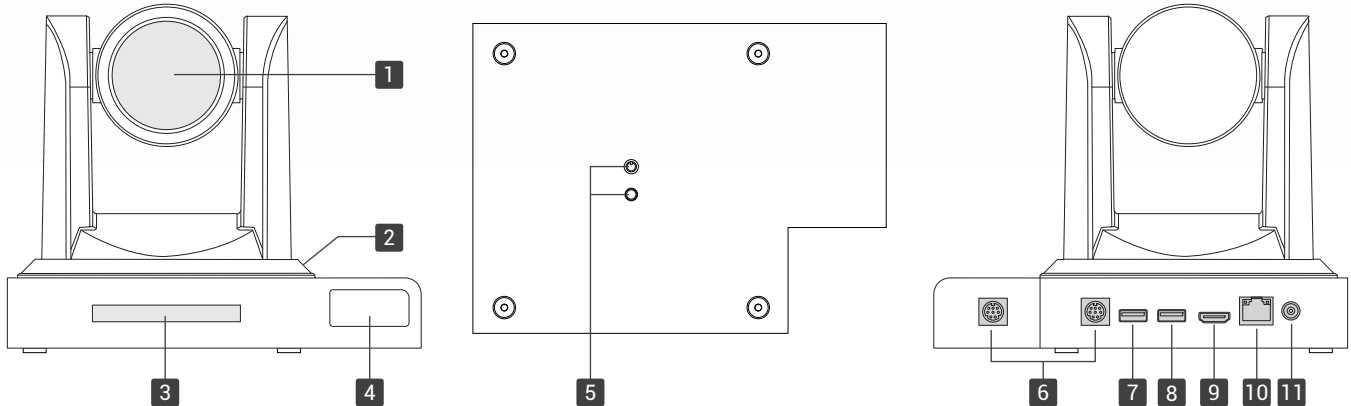

- 1 Camera lens
- 2 Base
- 3 IR receiver sensor
- 4 Tally light

- 5 Standard 1/4"20 UNC screw
- 6 RS-232 port for tally light
- 7 USB2.0
- 8 USB3.0

- 9 HDMI output
- 10 Ethernet RJ-45
- 11 Power (DC 12V)

Specifications

Model name	CI-22H PTZ Conference Camera
Camera	
Image Sensor	1/2.8" CMOS, 1920x1080
Minimum Illumination	0.5 Lux @ F 1.8 (AGC ON)
White Balance	Manual / auto / one push
Lens and Focus	20x optical zoom, manual/ auto
Focal Length	5.2 – 98 mm (20x)
F Number	F1.5 – F3.0
Field of View	55.8° (wide) – 3.2° (tele)
Video Compression	H.264
Video Output	HDMI 、 USB 3.0 、 USB 2.0
Max Resolution	1920x1080 @ 60fps (IP Streaming) 1920x1080 @ 60fps (HDMI / USB 3.0)
Image Auto Adjustment	BLC / auto white balance / focus / aperture / WDR / electronic shutter
Image Setting	Brightness / color / saturation / contrast / sharpness / BW mode / Gamma curve
SNR	>55dB
Pan/Tilt Rotation	-170°~+170°, -30°~+90°
Pan/Tilt Controller Speed	0.1~60° / second, 0.1~30° / second
Pan/Tilt Speed (Max.)	Pan: 60° / second, Tilt: 30° / second

Network and Control	
Network Interface	100 Mbps Ethernet (RJ-45)
Control Port	RS-232 port for tally light
Built-in Tally Light	Yes
Control Protocol	VISCA / Pelco-D / Pelco-P
Network Protocol	RTSP, RTMP, ONVIF
Preset Positions	Up to 255
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F), indoor only
Humidity	20% - 95% RF
Dimension (L x W x H)	156 x 208.5 x 173.5 mm
Weight	1.47 kg
Power Supply	12V DC, 1A
Power Consumption	12W (max.)
Accessories	Quick guide / power adapter / remote controller / RS-232 cable / USB 3.0 cable



AREC Inc. | www.arec.com | sales@arec.com
 Address: 3F, No. 367, Sec.2, Wenhua RD., Banqiao Dist.,
 New Taipei City 220, Taiwan (R.O.C)
 TEL: +886-2-8259-5060

Exclusive Representative in Europe, Africa and CIS countries
 ADENA Limited | www.a-dena.com
 E-MAIL: yakov@a-dena.com
 TEL: +886-2-8712-1882

AREC reserves the right to modify product specifications without prior notice.